


C3-200

Access Control
RFID 2 X Door Controller

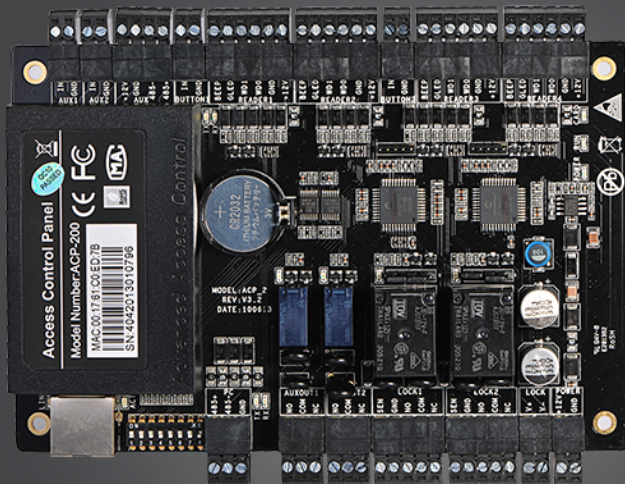

Features

Standard Features

- SD Card data backup
- Multiple hardware protection
- Supports different Wiegand readers
- Input / Output ports to control doors
- Stores 30000 user templates

Enhanced Features

- Anti-passback
- Interlock function
- Duress mode
- Webserver structure software

Software

- ZK Access Control Management 5.2

Related Products



CR10-E



KR100



RFID Cards



Exit Button



Maglocks



Mini UPS

Specifications

- User Capacity: 30,000 Cards
- Transaction Capacity: 100,000 transactions
- Communication: RS485, TCP/IP
- Data Backup: SD-card
- Output: 4 (2 X relay for lock & 2 X relay for Auxiliary)
- Wiegand IN Ports: 4
- Wiegand(Card reader): 4 (26-bit & 34bit)
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: Anti-passback, Duress, Interlock
- Power Supply: 9 - 14V DC 1A
- Operating Temperature: 0 °C - 55 °C
- Operating Humidity: 20% - 80%
- Dimension: 106 X 160 X 15mm

Configuration

